



**LEENDERS**

SINCE 1979

# POKER

INSTRUCTIONS EN



1. Remove all the sharp edges from the top and bottom with a pair of pliers, file and abrasive paper.




2. The smooth side of the leather is the upper side. Thread the leather lace through a hole in the twig. Leave approximately 10 cm protruding. Lay this 10cm flat on the steel. This will cause the leather to bulge up and this makes it more pleasant to hold.



3. Wind the leather lace tightly around the handle.



4. Feed the end through the second hole and pull the lace tight.

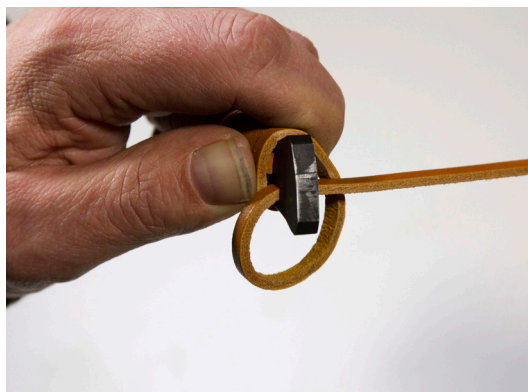

5. Cut or snip off the ends.

